
STEEL LADLE









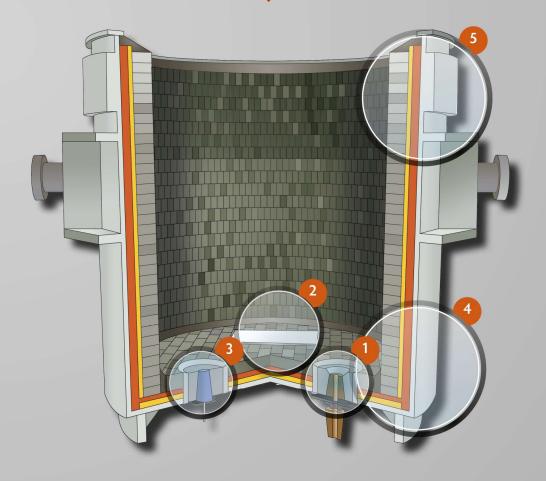



			Applications	
1	2	3	4	5
Pouring area	Impact area	Purging area	Sidewall lining	Slag area
Mortar for sealing nozzle	Impact tile	Precast well block for porous plug	Castable mix around bottom lining	Blocking mix on top lining
Slide gate sealing mortar	Blocking mix	Castable mix around well block	Ramming mix around bottom lining	Plastic mortar for blocking top lining
Precast well block	Hot repair castable mix	Ramming mix around well block	Back filling powder	Back filling powder
Castable mix around well block	Jointing cement	Mortar for sealing porous plug	Jointing cement	Jointing cement for safety bricks
Hot repair castable mixes		Hot repair castable mix	Mortar for repairing safety lining	_





Our	$\mathbf{\nu}$ roc	HILLE
Oui		เนษเอ

		Our Products	
Area	Applications	Products Refracol 29 DK,29 SDG1, S	
1) Pouring area	Mortar for sealing Intern nozzle	478 G2	
	Mastic cement for hot repair Intern nozzle	Refracol MI 4	
	Mortars for slide gate assembly	Refracol 620,620 A, 286 AC	
	Well block in tabular alumina precast mix	Refravibre 99 D	
	Well block in precast Spinel-alumina mix	Refravibre S390	
	Tabular alumina castable mix around well block	Beton 9400, 940 SLC FF	
	Spinel - alumina self flowing mix around well block	Castalone S 712 F	
2) Impact area	Spinel-alumina precast impact tile	In Refravibre SM 692	
	Self flowing castable mix for blocking impact tile	Castalone S712 F	
	Dry high MgO mix for hot repair	Mixomag 785 H	
	High alumina jointing mortars for HA and AMC bricks	Refracol 6, 6 A72, 6T	
3) Purging area	Well block in high alumina /spinel-alumina precast mix High alumina castable mixes for blocking well block	In Refravibre 99 D / S390 Beton 9400, 96 A	
	HA hot setting ramming mix for blocking well block	Refram 492	
	HA heat setting mortars for sealing porous plug	Refracol 29 B,26 ASG DP	
	HA hot seeting mortars for sealing porous plug	Refracol 620, 620 A	
	Dry high MgO mix for hot repair	Mixomag 785 H	
4) Sidewall lining	HA castable mixes for blocking bottom of wall lining	Beton 955 D, Rv 483 RTC	
	LC 65 % Castable mix for permanent lining	Refravibre 465 RTC	
	Spinel - alumina castable mix for blocking bottom	Castalone S 712 F	
	HA ramming mixes for blocking bottom of wall lining	PR 287, PR 288, PR 290	
	Backfilling mixes between working/safety lining	Caloref 94, Caloref 88 G12	
	85% MgO Backfilling mix between working/safety	Calomag 85	
	High alumina jointing mortars for working lining	Refracol 6 A72, 6T	
	Alumina air setting mortars for jointing safety bricks	Refracol 6, 8A, 6 A72	
	Air setting cement for jointing insulating bricks	Refracol 12 A	
	Plastic mortar for repairing safety lining Bi-component trowelling mix for repair permanent	PR 116 CA	
	lining	Refravibre H 882 T	
	Cements for filling cracks in permanent lining	Refracol 6, 306 T1	
5) Slag area	Castable mixes for blocking the top of working lining	Beton 955 D, RV 483 RTC	
	Top ladle blocks in metal- ceramic hybrid material	In FibroCeram	
	Powder mix for Filling back working lining	Caloref 88 G12	
	Chromite air setting mortar for jointing safety bricks	Refracol 7	

REFRACOL DUPONT et Cie

35 rue de la Gare - 59770 MARLY - France



